



# STABILIZERS UPS LIGHTING





# CONTENTS

|                                                                                                                                                                                                                    |    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Who we are                                                                                                                                                                                                         | 04 |
| <b>Voltage Stabiliser   Servo</b>                                                                                                                                                                                  | 06 |
| Top-notch stabilizer solutions, catering to various businesses, from small offices to hyperscale data centers                                                                                                      |    |
| <b>Voltage Stabiliser   Static</b>                                                                                                                                                                                 | 09 |
| Voltage fluctuations hinder electronic devices, causing data loss and damage. static voltage regulators offer stable output, overcoming conventional stabilizer issues.                                            |    |
| <b>SMF Lead Acid Battery</b>                                                                                                                                                                                       | 11 |
| Maintenance-free standby batteries use gel technology or adsorbed electrolyte systems with Sb-free lead alloys, minimizing electrolyte decomposition and stratification. Oxygen recombination ensures reliability. |    |
| <b>UPS   Uninterruptible Power Supply</b>                                                                                                                                                                          | 12 |
| UPS for industrial controls, process automation, medical equipment, building automation and emergency systems                                                                                                      |    |
| <b>Professional LED Light</b>                                                                                                                                                                                      | 15 |
| For Smarter Living & Working                                                                                                                                                                                       |    |
| <b>Magnetic LED Light</b>                                                                                                                                                                                          | 26 |
| Brilliance in Magnetic Illumination                                                                                                                                                                                |    |
| <b>Industrial LED Lights</b>                                                                                                                                                                                       | 29 |
| Powering Productivity with Precision                                                                                                                                                                               |    |
| <b>Flameproof LED Light</b>                                                                                                                                                                                        | 32 |
| Safe, durable LED lighting for hazardous environments: flameproof, efficient illumination.                                                                                                                         |    |













**TECHNICAL SPECIFICATION - DATA SHEET****Item : Static Voltage Stabilizer**

| Particulars             | Single Phase                     | Three Phase              |
|-------------------------|----------------------------------|--------------------------|
| Technology              | DSP Based ultra fast corrector   |                          |
| Capacities              |                                  |                          |
| Discreet IGBT based     | 1KVA to 30KVA                    | 3KVA to 90KVA            |
| IGBT module based       | 30KVA to 70KVA                   | 90KVA to 200KVA          |
| Control Type            | DSP based IGBT PWM               | DSP based IGBT PWM       |
|                         | Switching                        | Switching                |
| Input Voltage Range for | 1 Phase 3 Wire                   | 3 Phase 5 Wire           |
| 220V output -           |                                  |                          |
| Normal                  | 180V to 280V                     | 360V to 480V             |
| Wide                    | 150V to 290V                     | 300V to 500V             |
| Extended                | 90V to 300V                      | 250V to 520V             |
| Input Voltage Range for |                                  |                          |
| 110V output-            |                                  |                          |
| Normal                  | 90V to 130V                      | 180V to 240V             |
| Wide                    | 75V to 145V                      | 150V to 250V             |
| Extended                | 45V to 175V                      | 100V to 300V             |
| Output Voltage          | 220V +/- 1% settable             | 400/415V +/- 1% settable |
|                         | 110V +/- 1% settable             | 200/220V +/- 1% settable |
| Regulation              | +/- 1%                           | +/- 1%                   |
| Efficiency              | >97%                             | >97%                     |
| Input Frequency         | 45Hz to 65Hz                     | 45Hz to 65Hz             |
| Wave Form               | Same as input                    | Same as input            |
| Overload                | 110% for 60 sec, 130% for 10 sec |                          |
| Display                 | LCD for -                        | LCD for -                |
|                         | Input voltage                    | Input voltage            |
|                         | Outage voltage                   | Outage voltage           |
|                         | Load VA                          | Load VA                  |
|                         | Line frequency                   | Line frequency           |
|                         | Overload                         | Overload                 |
|                         | High voltage nput                | High voltage nput        |
|                         | Low voltage input                | Low voltage input        |
|                         | Cut off mode                     | Cut off mode             |
|                         | Bypass mode                      | Bypass mode              |
|                         | Set up mode                      | Set up mode              |
| Rate of Correction      | 20000V per second (10ms)         | 20000V per second (10ms) |
| Operating Temperature   | 0 to 50 deg Celsius              | 0 to 50 deg Celsius      |
| Duty cycle              | Continuous                       | Continuous               |



# UPS Uninterruptible Power Supply

UPS FOR INDUSTRIAL CONTROLS,  
PROCESS AUTOMATION, MEDICAL EQUIPMENT,  
BUILDING AUTOMATION AND  
EMERGENCY SYSTEMS.

from 10 KVA ————— to 50 MVA



## 1-PHASE 1 Kv UPS

**Input Voltage Range**  
160-280V

**Frequency**  
47-53Hz

**Acoustic Noise**  
<55dB at 1 meter

**Efficiency**  
>95%

**DC Voltage**  
Vary according to model

**Loading Capacity**  
110% for 2 minutes



## 1-PHASE 3 Kv UPS

**Input Voltage Range**  
160-280V

**Frequency**  
47-53Hz

**Acoustic Noise**  
<55dB at 1 meter

**Efficiency**  
>95%

**DC Voltage**  
Vary according to model

**Loading Capacity**  
110% for 2 minutes





# PROFESSIONAL LED LIGHTS FOR SMARTER LIVING & WORKING



| MODEL         | POWER | BODY SIZE | CUT SIZE |
|---------------|-------|-----------|----------|
| MOON CONSOLED | 8W    | 110       | 170      |
| MOON CONSOLED | 15W   | 155       | 110      |
| MOON CONSOLED | 22W   | 190       | 140      |



| MODEL  | POWER | BODY SIZE | CUT SIZE |
|--------|-------|-----------|----------|
| 3 in 1 | 8W    | 120       | 105      |
| 3 in 1 | 15W   | 170       | 155      |

| MODEL                | POWER | BODY SIZE | CUT SIZE |
|----------------------|-------|-----------|----------|
| RIMLESS LIKA SURFACE | 8W    | 90        | -        |
| RIMLESS LIKA SURFACE | 15W   | 145       | -        |
| RIMLESS LIKA SURFACE | 22W   | 170       | -        |



| MODEL          | POWER | BODY SIZE | CUT SIZE |
|----------------|-------|-----------|----------|
| ZERO BORDER SF | 6W    | 90        | -        |
| ZERO BORDER SF | 12W   | 120       | -        |
| ZERO BORDER SF | 18W   | 155       | -        |

| MODEL            | POWER      | BODY SIZE | CUT SIZE | COLOURS      |
|------------------|------------|-----------|----------|--------------|
| DOUBLE COLOUR SF | 6W (3+3)   | 105       | -        | WH+BL        |
| DOUBLE COLOUR SF | 12W (6+3)  | 145       | -        | WH+PK        |
| DOUBLE COLOUR SF | 18W (12+4) | 195       | -        | WH+PGB JELLY |



| MODEL    | POWER | BODY SIZE | CUT SIZE |
|----------|-------|-----------|----------|
| OREO COB | 6W    | 60        | 50       |
| OREO COB | 12W   | 85        | 75       |
| OREO COB | 18W   | 100       | 90       |



| MODEL    | POWER | BODY SIZE   | CUT SIZE |
|----------|-------|-------------|----------|
| LG MODEL | 3W    | 65          | 55       |
| LG MODEL | 7W    | 88          | 72       |
| LG MODEL | 12W   | 88          | 72       |
| LG MODEL | 18W   | 115         | 92       |
| LG MODEL | 24W   | 115         | 92       |
| LG MODEL | 30W   | 160 X 121MM | 130      |

| MODEL     | POWER | BODY SIZE | CUT SIZE | BODY COLO. | LED |
|-----------|-------|-----------|----------|------------|-----|
| TWI LIGHT | 12W   | 90        | 84X84    | BLACK      | WW  |
| TWI LIGHT | 24W   | 184       | 170X84   | WHITE      | NW  |



| MODEL    | POWER | BODY SIZE | CUT SIZE |
|----------|-------|-----------|----------|
| RING COB | 7W    | 80        | 60       |
| RING COB | 12W   | 100       | 88       |

| MODEL                                 | POWER | BODY SIZE | CUT SIZE |
|---------------------------------------|-------|-----------|----------|
| BEE COB<br>(BLACK, COPPER<br>& WHITE) | 3W    | 40X35     | 33       |



| MODEL         | POWER | BODY SIZE | CUT SIZE | BODY COLO. | REFLECTOR |
|---------------|-------|-----------|----------|------------|-----------|
| JAVA<br>MODEL | 7W    | 75        | 64       | BLACK-     | ROSE GOLD |
| JAVA<br>MODEL | 12W   | 85        | 74       | WHITE      | -BLACK    |

| MODEL      | POWER | BODY SIZE | CUT SIZE |
|------------|-------|-----------|----------|
| CUTY MODEL | 7W    | 40        | 35       |
| CUTY MODEL | 12W   | 60        | 55       |
| CUTY MODEL | 18W   | 75        | 70       |




| MODEL       | POWER | BODY SIZE | CUT SIZE | BODY COLO.            | LED |
|-------------|-------|-----------|----------|-----------------------|-----|
| CLASSIC COB | 7W    | 85        | 75       | BK/ROSE GOLD<br>BK/BK | WW  |
| CLASSIC COB | 15W   | 100       | 90       | WH/ROSE<br>GOLD WH/BK | NW  |

| MODEL                | POWER | BODY SIZE | CUT SIZE |
|----------------------|-------|-----------|----------|
| RIMLESS LIKA SURFACE | 8W    | 90        | -        |
| RIMLESS LIKA SURFACE | 15W   | 145       | -        |
| RIMLESS LIKA SURFACE | 22W   | 170       | -        |



| MODEL          | POWER | BODY SIZE | CUT SIZE |
|----------------|-------|-----------|----------|
| ZERO BORDER SF | 6W    | 90        | -        |
| ZERO BORDER SF | 12W   | 120       | -        |
| ZERO BORDER SF | 18W   | 155       | -        |

| MODEL | POWER | BODY SIZE | CUT SIZE | BODY COLO.   | LED |
|-------|-------|-----------|----------|--------------|-----|
| LINEA | 3W    | 45X45     | 35X35    | BK/ROSE GOLD | NW  |
| LINEA | 6W    | 45X67     | 35X55    | WH/ROSE GOLD | NW  |
| LINEA | 9W    | 45X105    | 35X95    | BK/BK        | NW  |
| LINEA | 15W   | 45X147    | 35X137   | WH/BK        | NW  |

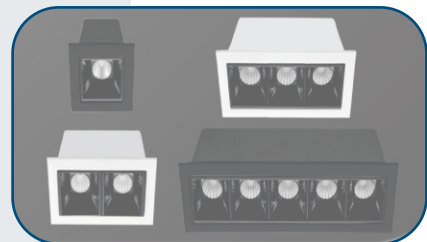

| MODEL         | POWER | BODY SIZE | CUT SIZE |
|---------------|-------|-----------|----------|
| CYLINDER ZOOM | 12W   | 105       | 95       |



| MODEL | POWER | BODY SIZE | CUT SIZE | COLOURS                            |
|-------|-------|-----------|----------|------------------------------------|
| FLOW  | 3W    | 75        | 55       | WW, WH, NW,<br>RED, GREEN,<br>BLUE |
| FLOW  | 5W    | 90        | 70       |                                    |

| MODEL | POWER | BODY SIZE | CUT SIZE |
|-------|-------|-----------|----------|
|-------|-------|-----------|----------|

Dot Button  
(WH,GR,BL  
PK,RD,WW)

1W

37

26



| MODEL         | POWER | BODY SIZE | BODY COLOUR     | REFLECTOR COLOUR     |
|---------------|-------|-----------|-----------------|----------------------|
| JAVA CYLINDER | 12W   | 80X110H   | Black/<br>White | Black /<br>Rose Gold |

| MODEL | POWER | BODY SIZE | BODY COLOUR |
|-------|-------|-----------|-------------|
|-------|-------|-----------|-------------|

TWIST CYLINDER 12W 55X165HH Black/White



| MODEL           | POWER | BODY SIZE | CUT SIZE |
|-----------------|-------|-----------|----------|
| Square Cylinder | 6W    | 55X85HH   | -        |
| Square Cylinder | 12W   | 75X100HH  | -        |

| MODEL    | POWER | BODY SIZE | BODY COLO. | REFLECTOR | LED         |
|----------|-------|-----------|------------|-----------|-------------|
| CYLINDER | 6W    | 55X65HH   | BLACK      | ROSE GOLD | 3000K/4000k |
| CYLINDER | 12W   | 75X90HH   | BLACK      | ROSE GOLD | 3000K/4000k |
| CYLINDER | 18W   | 95X105HH  | BLACK      | ROSE GOLD | 3000K/4000k |



| MODEL     | POWER | BODY SIZE | CUT SIZE |
|-----------|-------|-----------|----------|
| MLX MODEL | 3W    | -         | -        |
| MLX MODEL | 6W    | -         | -        |
| MLX MODEL | 9W    | -         | -        |



| MODEL          | POWER | BODY SIZE | CUT SIZE |
|----------------|-------|-----------|----------|
| CYLINDER TRACK | 10W   | -         | -        |
| CYLINDER TRACK | 20W   | -         | -        |
| CYLINDER TRACK | 30W   | -         | -        |

| MODEL       | POWER        | BODY COLOUR   |
|-------------|--------------|---------------|
| TRACK PATTI | 1MTR<br>2MTR | BLACK & WHITE |



| MODEL        | POWER | BODY COLOUR |
|--------------|-------|-------------|
| T-5<br>4 fit | 22W   | WHITE       |

| MODEL          | POWER | BODY SIZE | CUT SIZE |
|----------------|-------|-----------|----------|
| IP 65 CYLINDER | 12W   | 75X110H   | -        |



| MODEL         | POWER   |
|---------------|---------|
| IP 65 STRIKER | 3W (WW) |



| MODEL   | POWER | BODY SIZE                            |
|---------|-------|--------------------------------------|
| STRIKER | 3W    | WHITE,WW,<br>RED,GREEN,<br>BLUE,PINK |

| MODEL | POWER           | BODY SIZE | LED |
|-------|-----------------|-----------|-----|
| OPPO  | B- 22<br>HOLDER | 24"       | -   |




| MODEL | POWER           | BODY SIZE | LED |
|-------|-----------------|-----------|-----|
| OPPO  | B- 22<br>HOLDER | 12"       | -   |

## Adjustable Street Light Stand



## Adjustable Street Light Stand

| MODEL | POWER | LED      | CUT SIZE |
|-------|-------|----------|----------|
| STAR  | 20W   | W/W & WH | -        |

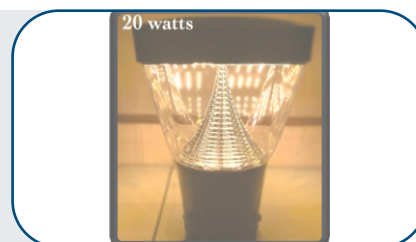





| MODEL | POWER | BODY SIZE | CUT SIZE |
|-------|-------|-----------|----------|
| SMPS  | 1AMP  | -         | -        |
| SMPS  | 2AMP  | -         | -        |
| SMPS  | 5AMP  | -         | -        |
| SMPS  | 10AMP | -         | -        |
| SMPS  | 16AMP | -         | -        |
| SMPS  | 20AMP | -         | -        |



| MODEL           | POWER |              |
|-----------------|-------|--------------|
| ML WHITE WOODEN | 10W   | THREE IN ONE |
| ML WHITE WOODEN | 15W   |              |

| MODEL | POWER | BODY COLOUR | LED COLOUR              |
|-------|-------|-------------|-------------------------|
| SPIKE | 5W    | BLACK       | WW,WH,RED<br>GREEN,BLUE |
| SPIKE | 9W    | BLACK       | WW<br>GREEN             |



| MODEL     | POWER | BODY COLOUR | HEIGHT  | LED |
|-----------|-------|-------------|---------|-----|
| SQ BOLARD | 12W   | BLACK       | 10 INCH | WW  |
| RD BOLARD | 12W   | BLACK       | 10 INCH | WW  |

# MAGNETIC LED LIGHT

Brilliance in Magnetic Illumination



## MODEL

M20-JD12  
M20-JD06

## POWER

6W  
12W

## MODEL

M20-JD300  
M20-JD600

## POWER

10W  
20W



## MODEL

M20-JDS10W  
M20-JDS20W

## POWER

10W  
20W

## MODEL

M20-JDL6W  
M20-JDL12

## POWER

6W  
12W



## MODEL

M20-CLB

## POWER

1M  
2M

| MODEL    | POWER |
|----------|-------|
| M20-CLC1 | 1M    |
|          | 2M    |
|          | 3M    |



| MODEL    | POWER |
|----------|-------|
| M20-CL-H | -     |

| MODEL    | POWER |
|----------|-------|
| M20-CL-I | -     |



| MODEL     | POWER |
|-----------|-------|
| M20-CL-H4 | -     |

| MODEL    | POWER |
|----------|-------|
| M20-CLBI | -     |




| MODEL    | POWER |
|----------|-------|
| M20-CLCI | -     |




| MODEL   | POWER |
|---------|-------|
| M20-CLK | 1M    |
|         | 2M    |
|         | 3M    |

| MODEL     | POWER |
|-----------|-------|
| M20-CLB-Z | -     |

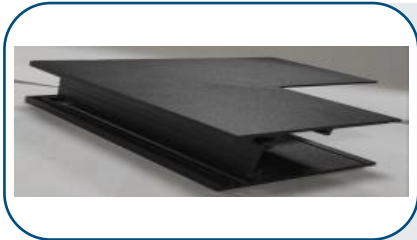

| MODEL     | POWER |
|-----------|-------|
| M20-CLB-I | -     |

| MODEL      | POWER |
|------------|-------|
| M20-CLC1-I | -     |

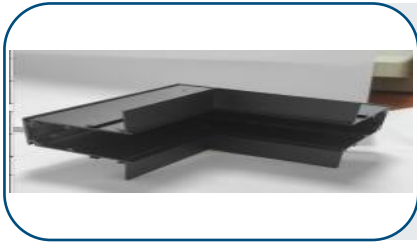

| MODEL                 | POWER |
|-----------------------|-------|
| Built-in Power Supply | 100W  |

| MODEL                 | POWER |
|-----------------------|-------|
| Built-in Power Supply | 200W  |







Dimond Series

## LED FLOOD LIGHT DOWN CHOCK RGB

| Model No. | WATT | STANDARD PACKING |
|-----------|------|------------------|
| EFL131    | 50W  | 20               |
| EFL132    | 100W | 10               |

## LED FLOOD LIGHT DOWN CHOCK

| Model No. | WATT | STANDARD PACKING |
|-----------|------|------------------|
| EFL126    | 30W  | 24               |
| EFL127    | 50W  | 18               |
| EFL128    | 100W | 12               |
| EFL129    | 150W | 12               |
| EFL130    | 200W | 8                |



Crystal Series (Lens)

## LED FLOOD LIGHT DOWN CHOCK

| Model No. | WATT | STANDARD PACKING |
|-----------|------|------------------|
| EFL121    | 100W | 10               |
| EFL122    | 150W | 8                |
| EFL123    | 200W | 6                |
| EFL124    | 250W | 4                |
| EFL125    | 360W | 4                |



Ultima Series (Lens)

## LED HEAVY FLOOD LIGHT BACK CHOCK

| Model No. | WATT | STANDARD PACKING |
|-----------|------|------------------|
| EFL113    | 30W  | 12               |
| EFL114    | 50W  | 8                |
| EFL115    | 100W | 6                |
| EFL116    | 150W | 4                |
| EFL117    | 200W | 4                |
| EFL118    | 300W | 4                |
| EFL119    | 400W | 2                |
| EFL120    | 600W | 2                |



Supreme Series

**LED STREET LIGHT HEAVY**


| Model No. | WATT  | STANDARD PACKING |
|-----------|-------|------------------|
| ESL133    | 18 W  | 40               |
| ESL134    | 24 W  | 40               |
| ESL135    | 36 W  | 32               |
| ESL136    | 50 W  | 24               |
| ESL137    | 72 W  | 18               |
| ESL138    | 100 W | 12               |
| ESL139    | 150 W | 8                |
| ESL140    | 200 W | 8                |



Blaze Series

**LED STREET LIGHT PREMIUM QUALITY LENS**

| Model No. | WATT | STANDARD PACKING |
|-----------|------|------------------|
| ESL141    | 24W  | 40               |
| ESL142    | 36W  | 20               |
| ESL143    | 50W  | 16               |
| ESL144    | 72W  | 12               |
| ESL145    | 100W | 12               |
| ESL146    | 150W | 8                |



Glory Series

**LED STREET LIGHT LENS (ECO)**

| Model No. | WATT | STANDARD PACKING |
|-----------|------|------------------|
| ESL147    | 24W  | 40               |
| ESL148    | 36W  | 20               |
| ESL149    | 50W  | 16               |



Bullet Series

**LED HIGH BAY LIGHT**

| Model No. | WATT | STANDARD PACKING |
|-----------|------|------------------|
| EHBL150   | 50W  | 12               |
| EHBL151   | 100W | 8                |
| EHBL152   | 150W | 8                |
| EHBL153   | 200W | 6                |
| EHBL154   | 300W | 4                |



Sparkle Series

**LED HIGH BAY LIGHT LENS**

| Model No. | WATT | STANDARD PACKING |
|-----------|------|------------------|
| EHBL155   | 60W  | 12               |
| EHBL156   | 120W | 8                |
| EHBL157   | 240W | 6                |



Glare Series

## High Lumens Output & High Brightness

[illegible]

**Gas Group, Zone Classification:**  
**Zone 1 & Zone 2 Gas Group: IIA & IIB Atmosphere**

**This model has multipurpose usage and can be used as:**

- Flameproof Well Glass
- Flameproof Floor Light
- Flameproof Street Light

[illegible]

- [illegible]



**BIS Approved  
Control Gear**

[illegible]

- [illegible]

[illegible]

|                           |   |                             |
|---------------------------|---|-----------------------------|
| Input Voltage             | : | 85-310v AC - 50Hz           |
| Lumens Efficiency of LECD | : | 200 Lumens Per Watt         |
| Surge Protection          | : | Upto 10Kv                   |
| Power Factor              | : | 0.95                        |
| Ingress Protecton         | : | IP66                        |
| Operating Temperature     | : | -40 to 60 Degree Centigrade |
| 440v Protection           | : | Yes                         |
| Over Voltage Protection   | : | Yes                         |
| Under Voltage Protection  | : | Yes                         |
| Auto Cut-Off              | : | Yes                         |





# FLAMEPROOF LED LIGHT

High Lumens Output



**WATTAGE AVAILABLE  
30w to 150w**

**Approved By: CIMFR | PESO**


Gas Group, Zone Classification:  
Zone 1 & Zone 2 Gas Group:  
IIA, IIB, IIC Gas Atmosphere

This model has multipurpose usage  
and can be used as:

- Flameproof Well Glass
- Flameproof Floor Light
- Flameproof Street Light

Physical Details

- Material: LM6 Grade Aluminum or Higher Grade
- Construction: Pressure Die Cast Aluminium Enclosure
- Suitable Flexing: Ceiling / Suspension Mount

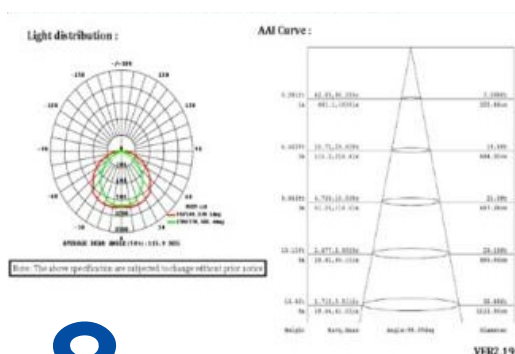

BIS Approved  
Control Gear



## TECHNICAL SPECIFICATION

|                           |                               |
|---------------------------|-------------------------------|
| Input Voltage             | : 85-310v AC - 50Hz           |
| Lumens Efficiency of LECD | : 200-220 Lumens Per Watt     |
| Surge Protection          | : Upto 6Kv                    |
| Power Factor              | : 0.95                        |
| Ingress Protection        | : IP66                        |
| Operating Temperature     | : -40 to 60 Degree Centigrade |
| 440v Protection           | : Yes                         |
| Over Voltage Protection   | : Yes                         |
| Under Voltage Protection  | : Yes                         |
| Auto Cut-Off              | : Yes                         |

## FEATURES & BENEFITS

- Delivers excellent illumination & comfort
- Long life & Photo biologically safe LED's
- High performance electronic driver ensures zero maintenance
- No harmful UV & IR radiations
- Environment friendly as it does not contain mercury
- Instant light with low running temperatures





# WELL GLASS LED LIGHT

High Lumens Output

**WATTAGE AVAILABLE  
60w**

**Approved By: CIMFR**

## Applications


Factories -  
Industrial Sheds -  
Ware House -

Potted Waterproof Driver  
Low THD < 10%  
Open Circuit Protection,  
Over Voltage Protection,  
Inbuilt 6Kv Surge Voltage Protection  
(Optional upto 10Kv to 20Kv)  
Possible with additional  
External or Built in SPD



## TECHNICAL SPECIFICATION

|                          |                               |
|--------------------------|-------------------------------|
| Input Voltage            | : 85-310v AC - 50Hz           |
| Lumens Efficiency of LED | : 140 Lumens Per Watt         |
| Surge Protection         | : Upto 6Kv                    |
| Power Factor             | : 0.95                        |
| Ingress Protection       | : IP67                        |
| Operating Temperature    | : -45 to 60 Degree Centigrade |
| 440v Protection          | : Yes                         |
| Over Voltage Protection  | : Yes                         |
| Under Voltage Protection | : Yes                         |
| Auto Cut-Off             | : Yes                         |

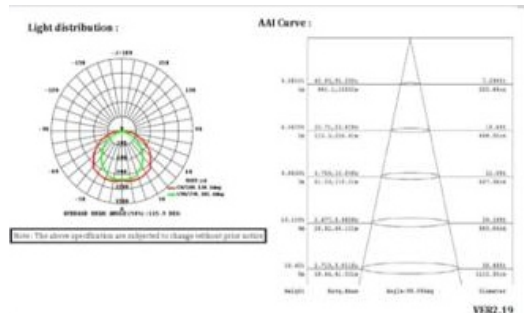

BIS Approved  
Control Gear



## FEATURES & BENEFITS

- Delivers excellent illumination & comfort
- Long life & Photo biologically safe LED's
- High performance electronic driver ensures zero maintenance
- No harmful UV & IR radiations
- Environment friendly as it does not contain mercury
- Instant light with low running temperatures





Companies are more and more sensitive to Power Quality issues because they can cause troubles and damages to equipments.

Our Power Quality solutions:

**SERVO VOLTAGE STABILISERS**  
**STATIC VOLTAGE STABILISERS**  
**ONLINE UN-INTERRUPTED POWER SUPPLIES**  
**TAILOR-MADE LIGHTING SOLUTIONS**



## Shri Ram Enterprise

Shed No 23 Gajanan Industrial Hub, B/H Matrix Plaza, Near Vinzol Patiya, Phase-4, Vatva GIDC, Vatva, Ahmedabad - 382445

+91 99983 03779, +91 70162 46081

shriramenterprise853@gmail.com

www.shriramentindia.com